


EASYBAR LIQUOR ROOM COMPONENTS


SIXTEEN BRAND SYSTEM

SIXTEEN-PUMP RAIL

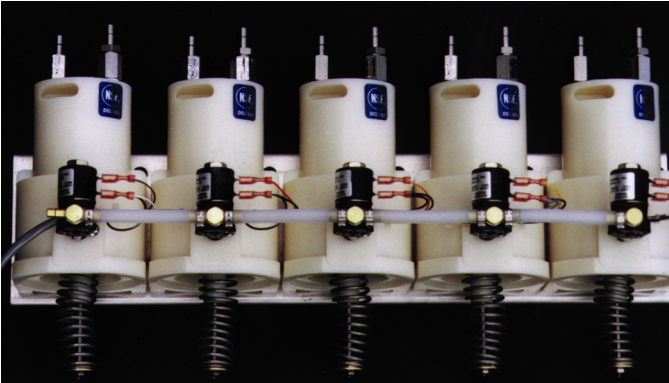


DIMS: 16-PUMP RAIL: 60"W x 6"D x 12"H

THREE-BOTTLE MANIFOLDS

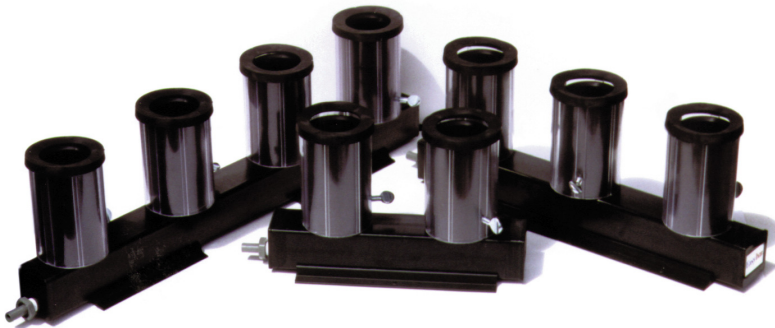

DIMS: 3"W x 6 1/2"H 15 1/2"D - TO BE MOUNTED ON WIRE SHELVING or WALL MOUNTED

POINT-OF-PUMP ELECTRONICS

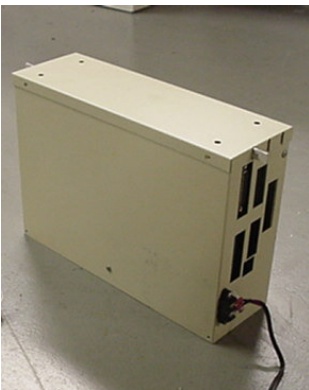

DIMS: 4"W x 12 1/2"D x 8 1/2"H - *Each requires 2 dedicated/isolated ground 110 outlets.*

EASYBAR LIQUOR ROOM COMPONENTS - CONTINUED

COMMUNICATION CO-PROCESSOR



DIMS: 4"W x 12 1/2"D x 8 1/2"H - *Each requires 1 dedicated/isolated ground 110 outlet plus 1 for computer.*

AIR COMPRESSOR

NO PHOTO AVAILABLE

Requires One 20 Amp Dedicated Circuit.

WIRE SHELVING UNIT

NO PHOTO AVAILABLE

DIMS: 48" W x 18"D x 72" H (For Casters Add 4")

COMPUTER IS TO BE SUPPLIED BY OWNER.


EASYBAR LIQUOR STATION COMPONENTS SIXTEEN BRAND SYSTEM

SINGLE GUN BOX (QTY 1 PER STATION)




DIMS: 5 1/2"W x 3 1/2"H x 4"D

SIXTEEN-POSITION SOLENOID RAIL (QTY 1 PER STATION)

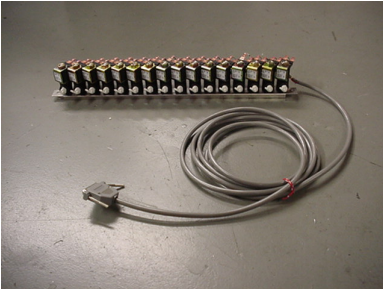

DIMS: 22"W x 4"D x 3 1/2"H

POINT-OF-DISPENSE ELECTRONICS (QTY 1 PER STATION)





DIMS: 4"W x 12 1/2"D x 8 1/2"H - *Requires 1 dedicated/isolated ground 110 outlet.*

NOTE: Stations that will be INTERFACED to Point-of-Sale system require 1/2" conduit between Easybar electronics & Point-of-Sale terminal for interface cables.


EASYBAR LIQUOR DISPENSING SYSTEM

ONE- AND TWO-STATION CONFIGURATION

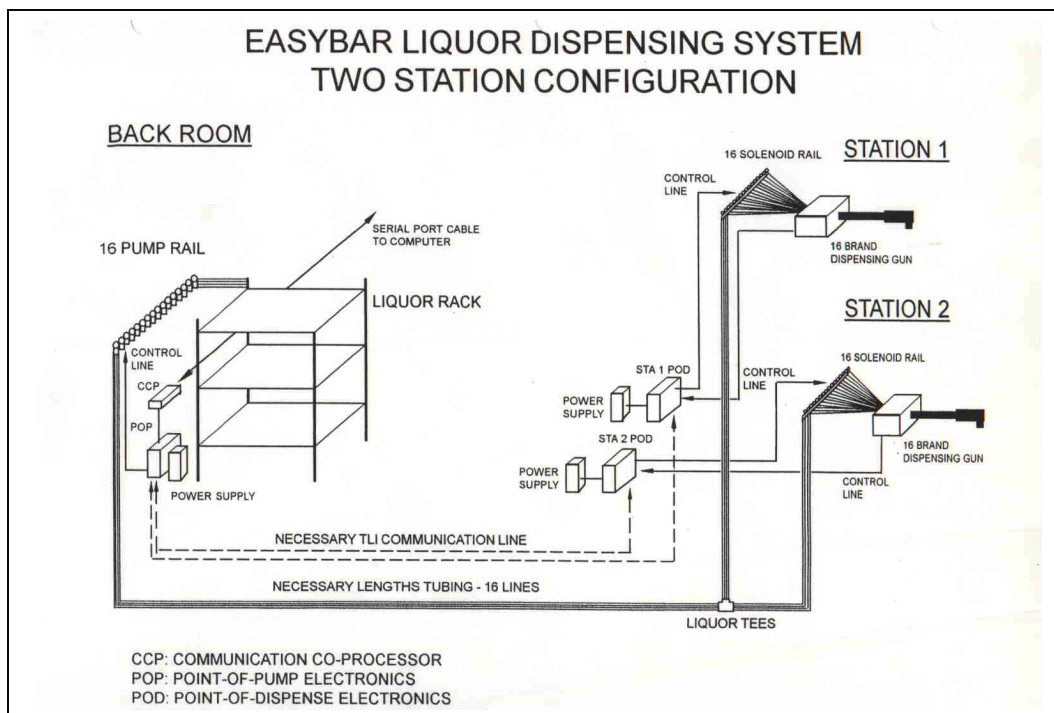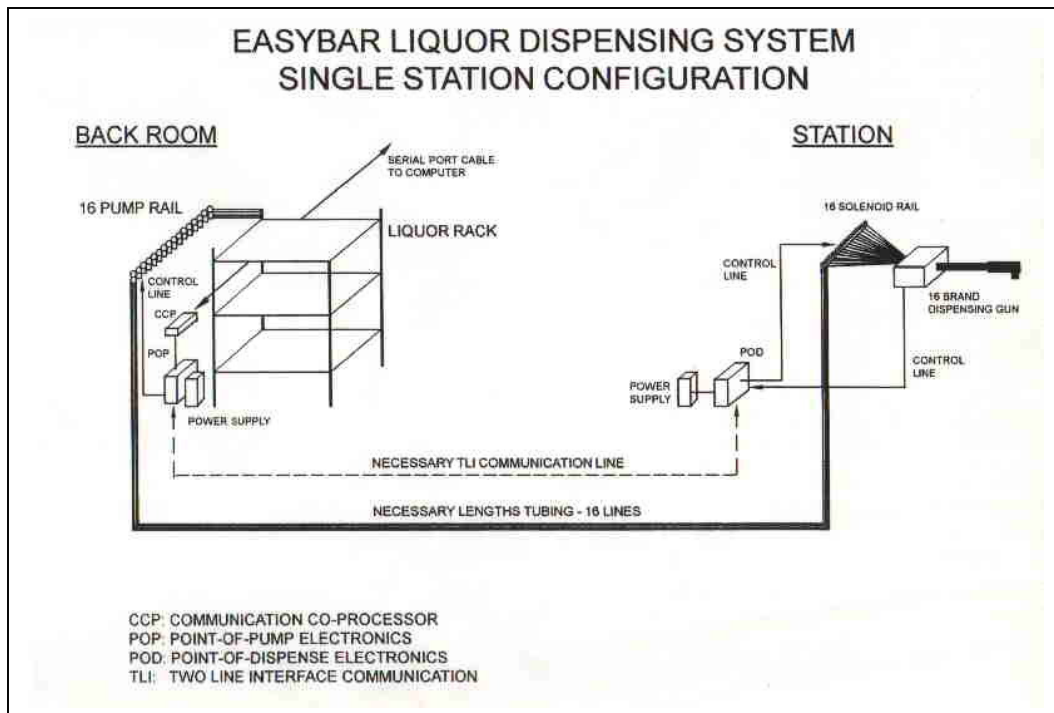

AC Power Line Requirements

- ❶ Easybar dispensing systems require a dedicated, isolated “clean” power circuit for proper operation and reliability.
- ❷ The circuit must have 3 wires: power (hot), neutral, and ground. The wires should be the same size.
- ❸ Conduit ground is NOT permissible. Ground and neutral should be separated.
- ❹ Receptacle for this circuit should be isolated bond type: Hubble IG 5262 or equivalent.
- ❺ The wiring of the receptacle should meet the National Electrical Code: black (hot) wire to the right side; white (neutral) to the left side; and green (ground) wire to the bottom lead of the receptacle.
- ❻ If wiring is to a sub-panel, the separate ground conductor (green wire) must “pass through” that panel and continue to the primary grounding electrode.
- ❼ Warranty or service agreement may be voided for failure to comply with proper electrical and grounding requirements.
- ❽ For Easybar® systems that are to be interfaced to Point of Sale (POS) terminals or electronic cash registers (ECR), check with manufacturer’s ECR or POS AC power line requirements.
- ❾ Each dispensing station needs an isolated power circuit as well as one in the liquor room for the Point of Pump (POP).

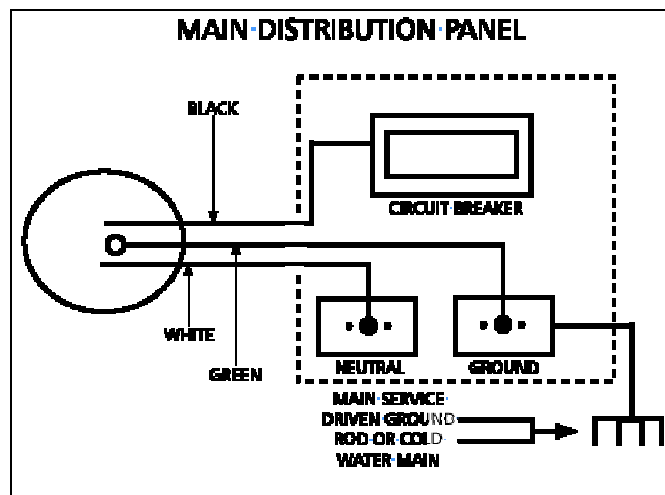

Easybar Conduit Requirements

- All runs 6" conduit – material as required
- All 90 turns indicated are sweep 90
- Pull box/junction every 100' (approx)
- No pull box on 90 turns
- 24" x 24" x 12" minimum pull box size
- No more than four direction change between pull box
- Soda lines to run with liquor lines unless noted
- All conduit end stub ups as required by local Health Department
- Marked lines are for explanation and show general direction only
- Wall chases at best locations at plumber's discretion
- All runs require best straight line possible

Computer Specifications

Minimum System to Support Easybar® Beverage Management Software for Windows

- IBM Compatible Personal Computer
- Windows 95 or Greater (Includes 98, NT, 2000, ME, XP)
- 2G HD
- 64M RAM
- Min 265 Colors Monitor
- CD
- Mouse
- 1 Serial Port
- Windows Compatible Printer

CONSTRUCTION CHECKLIST

for

Easybar Liquor Dispensing Systems

Items that MUST be ready on arrival of installer are:

FOR ALL DISPENSING SYSTEMS

- Bar tops and underbar / surrounding construction must be completely installed.
- Conduit or unobstructed area to run tubing from liquor room to all stations must be available.
- Electrical outlets must be at each station and in the pump room. Each station requires ONE (1 for the POD) and the liquor room requires THREE (2 for the POP, and 1 DEDICATED 20 AMP CIRCUIT for the air compressor – **CLCS requires an additional outlet for the CCP**).
- We must have a contact on the job site to give us physical access to liquor room, computer, etc.
- Complete liquor menu for all items dispensed with Easybar including pour sizes, cocktail recipes, prices, etc.
- Liquor MUST be on-site so we can pump the system up.

FOR ALL CLCS SYSTEMS

- Computer must be on-site and available for programming (i.e. we must have passwords, etc to install and program our software).

FOR CLCS SYSTEMS THAT ARE INTERFACED TO POS SYSTEM

- Conduit for cable must be available. TLI for the stations can be run with tubing, but we also need conduit for cable back to the CCP (if the computer is not in the liquor room) and conduit for interface cable between the POD and the POS terminal.
- We must have a contact with POS company to coordinate PLU numbers.